


Attachment bracket with OilQuick function enables hitching and unhitching of the Grab John unit in seconds directly from the cab.

V-shaped steering guide provides optimal steering and support for oblong objects.


The grab unit is based on well known and proven Grab John technology with double cylinders equipped with relief valves and check valves for maximum security.

Robust box construction.

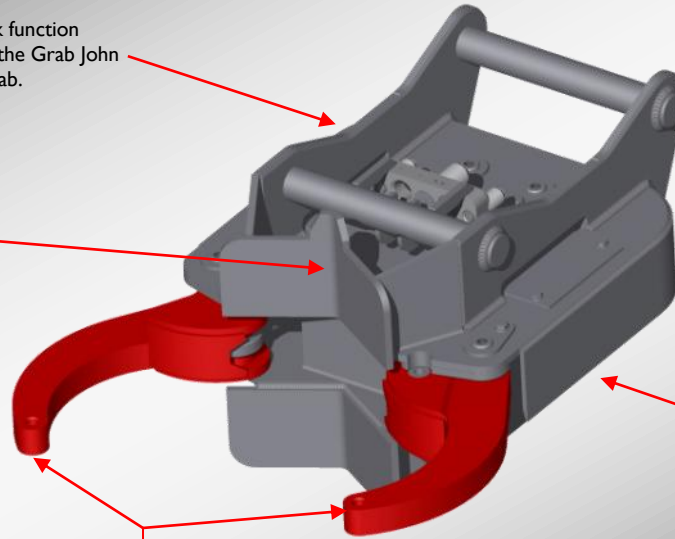

Hydraulic grab claws gives Grab John its unique "thumb grip"


## Grab John grab unit - Gives your Tiltrotator a "thumb grip"

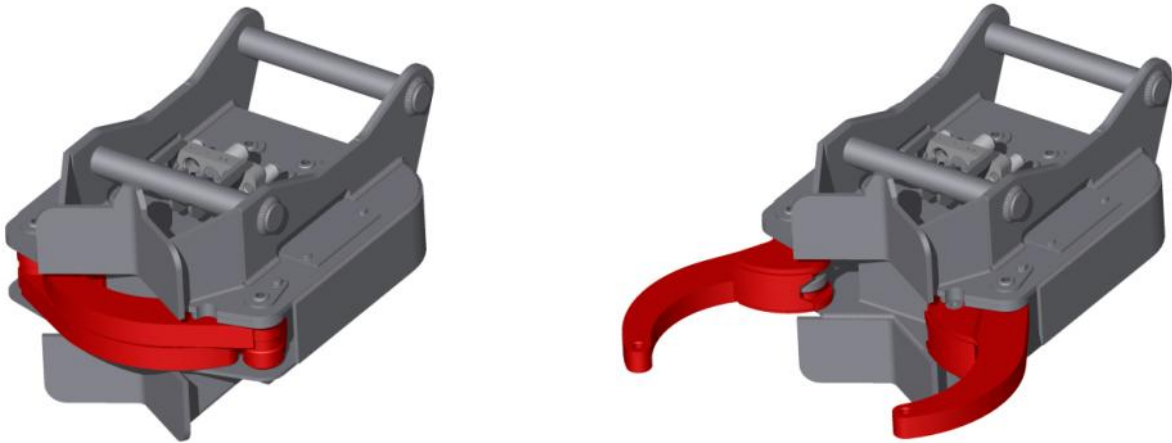

The Grab John grab units are designed to be extremely robust and developed especially for construction companies. Thanks to their powerful grab claws, the grab units are suitable for various lifting and sorting jobs with the excavator. The grab units can in seconds be attached to the excavator's quick coupler or used under the tiltrotator giving your machine an extra "thumb grip" that is always at hand.

### Advantages with Grab John

- Suitable for demolition, wrecking and sorting of materials.
- Homogenous grab claws in a robust design makes the grab unit adapted for tough conditions.
- Can be connected directly to the excavators quick coupler or under the tiltrotator.

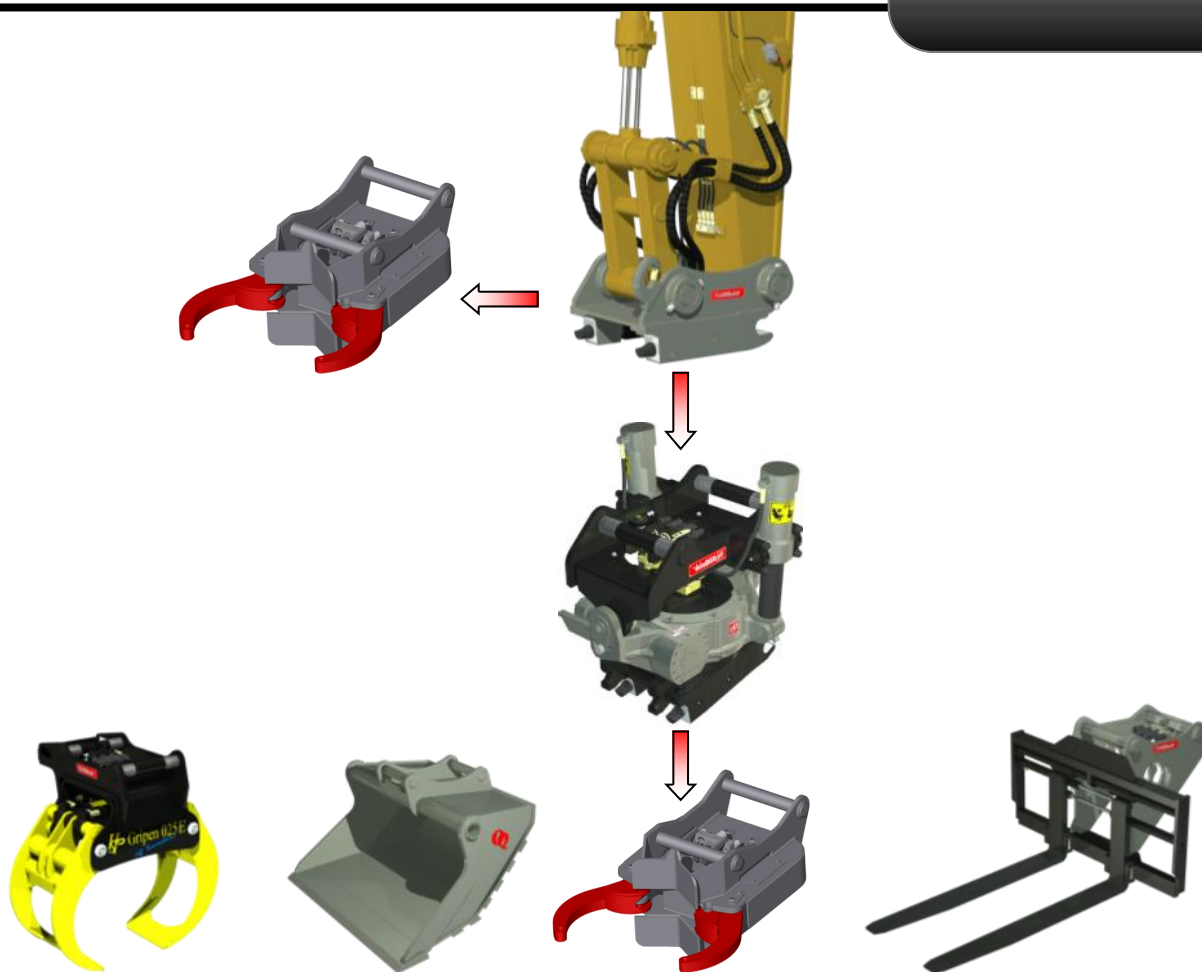

Technical data	GJK 10	GJK 25	GJK 30
Width (mm)	700	780	990
Weight (kg)	265	465/480/495	660/710
Max. claw opening (mm)	630	800	800
Length of steering guide groove incl. support on mounting plate	347	532	565
Hydraulic cylinder dimensions (mm)	80/40*120	100/50*180	110/50*175
Each cylinder is equipped with integrated hose break valves	Yes	Yes	Yes
Cylinder power at 180 bar (kp)	6770 kp	6770 kp	6770 kp
The hydraulic components of the grab unit are dimensioned for a working pressure of up to	250 Bar	250 Bar	250 Bar
Attachment bracket with OilQuick function	OQ45, 2x1/2"	OQ60,2x3/4"/ OQ65,2x3/4"/ OQ70, 2x1"	OQ70/55, 2x1"/OQ80, 2x1"
Clamping force at claw tip at 180 bar (kN)	1200 kp	2120 kp	2370 kp
Suitable under Tiltrotator	OQTR 30, OQTR 40	OQTR 40, OQTR 60B, OQTR 80	OQTR 80

Specifications subject to change without notice.

**Manufacturer:**

**OilQuick AB**  
Box 1055  
824 12 Hudiksvall  
Sweden

Tel. +46 650 - 153 40  
Fax. +46 650 - 148 84

information@oilquick.com  
www.oilquick.com

**Distributor:**